




S15 Non-Metallic

SANDPIPER AIR-OPERATED DIAPHRAGM PUMPS

KelairPumps

**5-year warranty
(wearing parts excluded)**

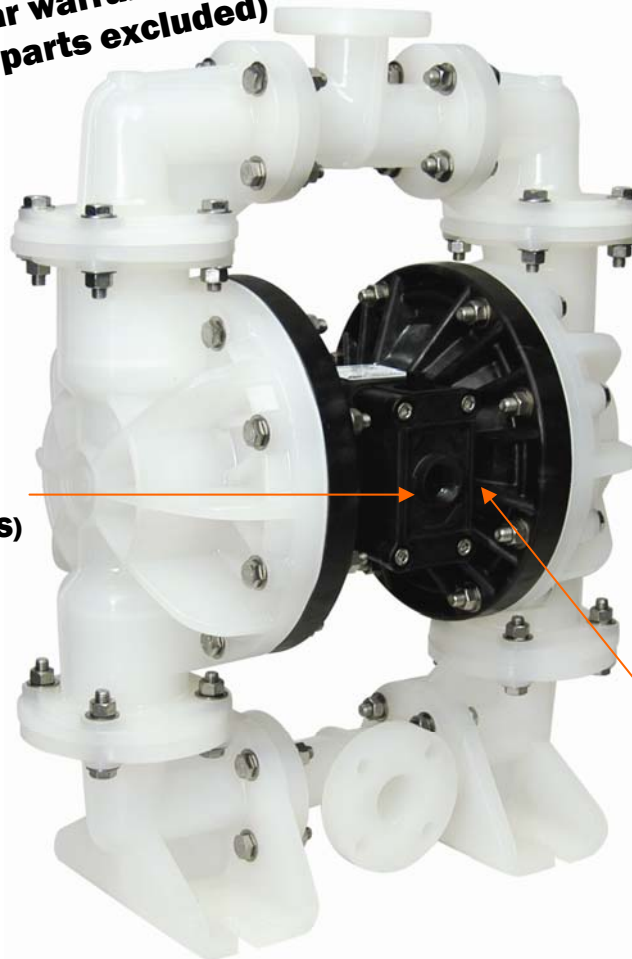

**Externally serviceable
air valve design (ESADS)**

**Fully bolted design
No clamp bands**

**No lube,
non-stall air
valve design
GUARANTEED**

FEATURES & BENEFITS


- Size: 1 1/2" 125lb ANSI flange
- Flow: 378 l/m
- Head: 6.8 bar
- Solids: Up to 12 mm
- Wetted Materials
 - Polypropylene
 - PVDF
- Non-wetted Materials
 - Polypropylene
- Elastomer Options
 - Santoprene
 - Neoprene
 - Buna
 - Teflon

Call Kelair Direct 1300 789 466



S15 Non-Metallic

INTAKE/DISCHARGE PIPE SIZE 1 1/2" ANSI Flange or PN10 40mm DIN Flange	CAPACITY 0 to 100 gallons per minute (0 to 378 liters per minute)	AIR VALVE No-lube, no-stall design	SOLIDS-HANDLING Up to .47 in. (12mm)	HEADS UP TO 100 psi or 231 ft. of water (7 bar or 70 meters)	DISPLACEMENT/STROKE .43 Gallon / 1.63 liter
--	--	---	--	---	---

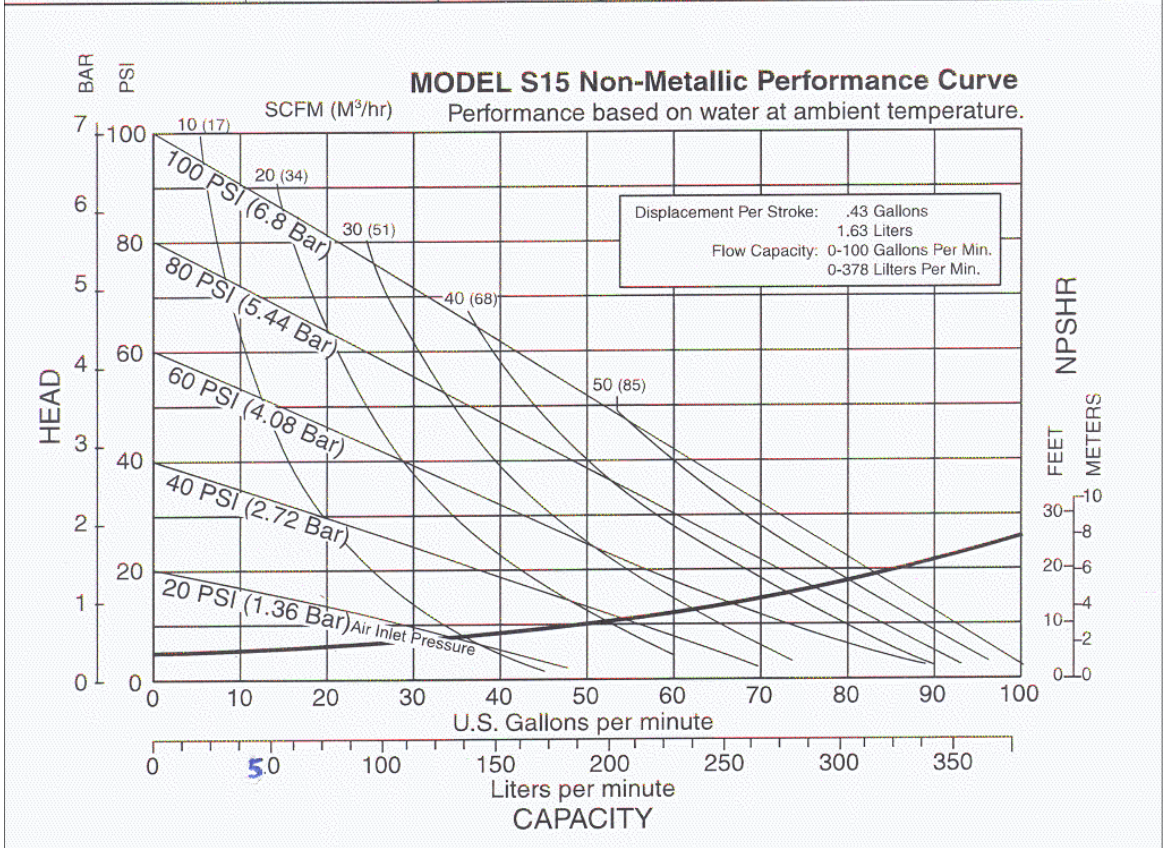

Sandpiper pumps are designed to be powered only by compressed air

Note: Porting Flanges are also available with PN10 40mm DIN bolting configuration.

