




KelairPumps

S30 Metallic

SANDPIPER AIR-OPERATED DIAPHRAGM PUMPS


**5-year warranty
(wearing parts excluded)**

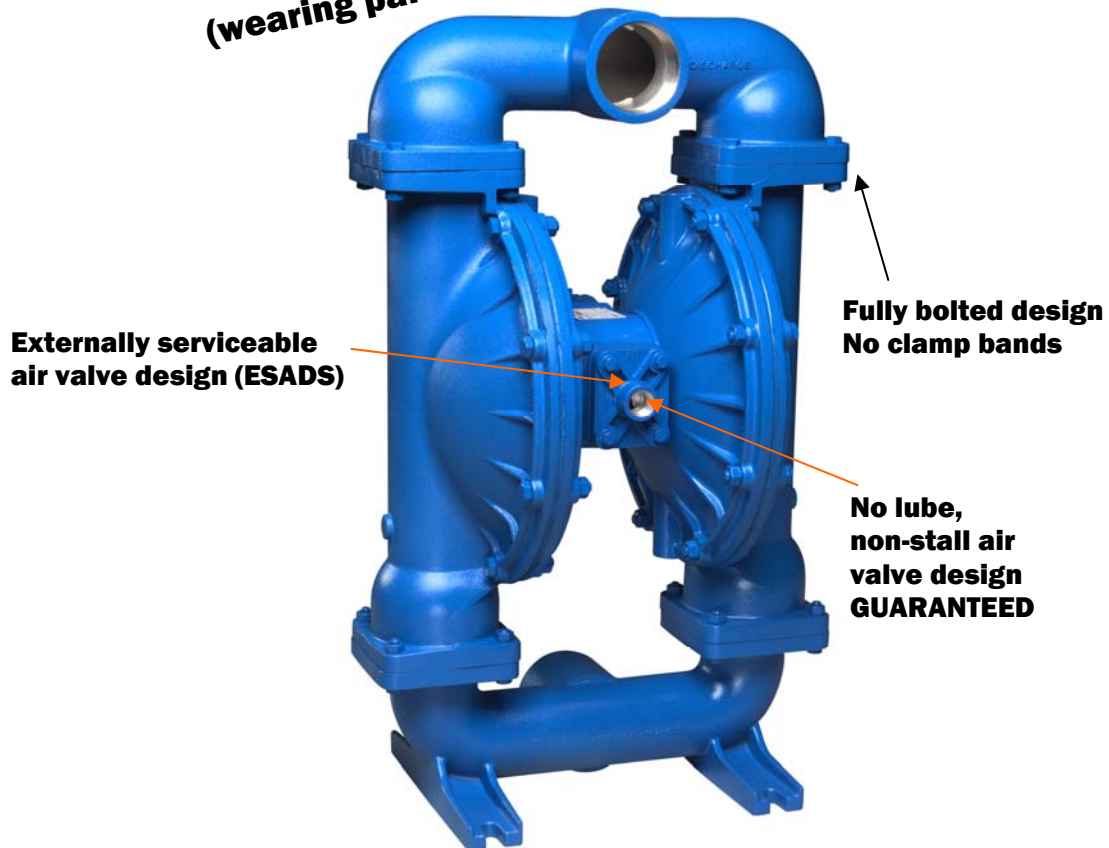

FEATURES & BENEFITS

- Size: 3" BSPT/ANSI flg.
- Flow: 889 l/m
- Head: 8.6 bar
- Solids: Up to 6mm
- Wetted Materials
 - Aluminium
 - Cast Iron
 - 316 Stainless Steel
 - Hastelloy C
- Non-wetted Materials
 - Aluminium
 - Cast Iron
- Elastomer Options
 - Santoprene
 - Buna N
 - Teflon
 - Neoprene
 - EPDM
 - Viton

Call Kelair Direct 1300 789 466






KelairPumps

S30 Metallic

| | | | | | |
|--|--|---|---|--|---|
| INTAKE/DISCHARGE PIPE SIZE 3" NPT (Internal) 3" BSPT Tapered (Internal) | CAPACITY 0 to 235 gallons per minute (0 to 889 liters per minute) | AIR VALVE No-tube, no-stall design | SOLIDS-HANDLING Up to .25 in. (6mm) | HEADS UP TO 125 psi or 289 ft. of water (8.6 Kg/cm ² or 86 meters) | DISPLACEMENT/STROKE .94 Gallon / 3.56 liter |
|--|--|---|---|--|---|

Sandpiper pumps are designed to be powered only by compressed air

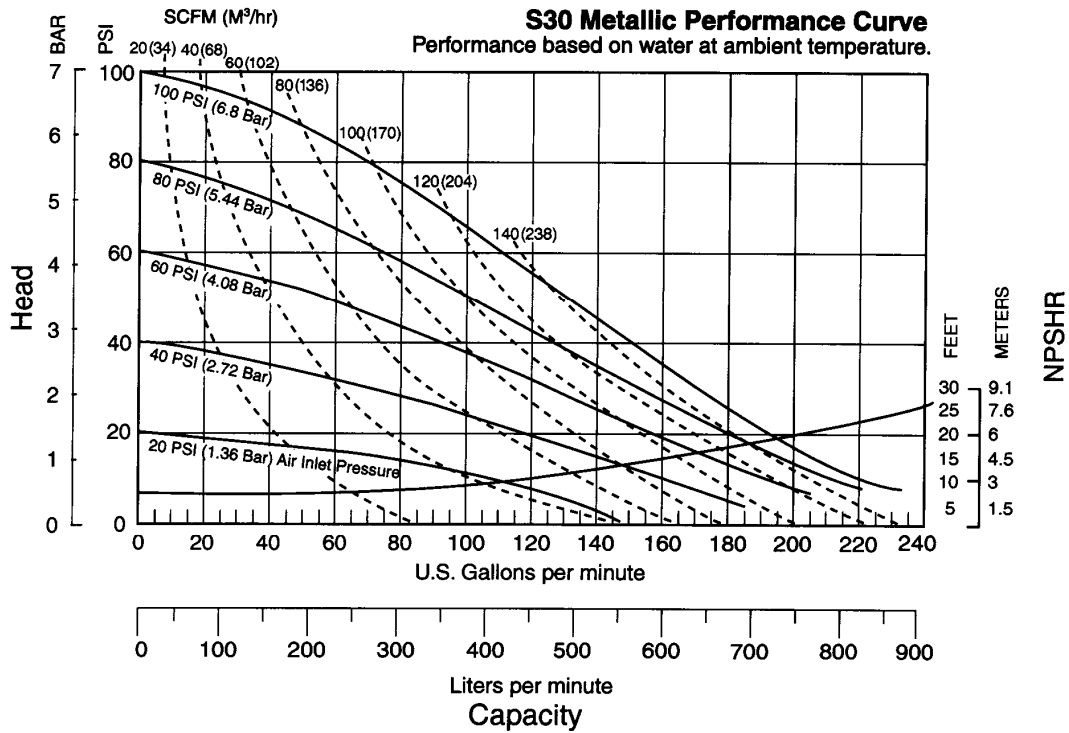

Dimensions in Millimeters
Dimensional Tolerance: ± 3mm

